



POLYTRON DEVICES, Inc.

# 75 WATT QUARTER BRICK



Regulated,  
2:1 Input Range  
DC/DC Converters



## FEATURES

- **UL and CE Approved**
- **Single Output Up to 25A**
- **No Minimum Load**
- **Adjustable Output Voltage**
- **High Efficiency (Up to 90%)**
- **Compact 2.28" x 1.45" x 0.50" Quarter Brick Package**

OFQ75 Series

## Specifications

Typical @ 25°C Under Full Load and Nominal Input Voltage, Unless Otherwise Specified.

### INPUT

Input Voltages	48Vdc	36-72 Vdc
Input Filter		L-C Type
Start Up Time		Nominal Vin and Constant Resistive Load
Power Up		25mS Typ
Remote ON/OFF		25mS Typ
Remote on/off (Note 3)		
(Negative Logic) DC-DC ON		Short or $OV < V_r < 1.2V$
DC-DC Off		Open or $3.5V < V_r < 15V$
(Positive Logic) DC-DC ON		Open or $3.5V < V_r < 15V$
DC-DC Off		Short or $OV < V_r < 1.2V$

### OUTPUT

Voltage Accuracy (FL and Nominal Vin)		$\pm 1.5\%$
Voltage Adjustability		$\pm 10\%$ , -20%
Line Regulation (LL to HL at FL)		$\pm 0.2\%$
Load Regulation. (NL to FL)		1.8Vdc 5.4mV
	2.5Vdc 7.5mV, 3.3Vdc 10mV, 5Vdc 15mV	
Ripple and Noise (20MHz BW) (Measured with a 1uF M/C & a 10uFT/C)		100mVp-p
Temperature Coefficient (at FL)		$\pm 0.02\%/^{\circ}C$ , max
Transient Response, 25% load step change		200uS

### GENERAL

Efficiency		See Table
Isolation Voltage		1600Vdc, min.
Isolation Resistance		10 <sup>7</sup> Ohms, min.
Switching Frequency		270KHz, typ.
Protection	Over Voltage Protection (Non-latching hiccup)	120% Vout max.
	Over current protection threshold	110%-140% of load
	Short circuit protection	hiccup, automatic recovery

### ENVIRONMENTAL

Operating Base Plate Temperature Range		-40° C to +100° C
Storage Temperature Range		-55° C to +125° C
Humidity, Max, Non-Condensing		95%

### PHYSICAL

Case Material		Aluminum base-plate
Weight		42g (1.46 oz.)
Dimensions		2.28" x 1.45" x 0.50" Package (57.9 X 36.83 X 12.7 mm)

### EMC CHARACTERISTICS

Conducted emissions	EN55022	Level A
	EN55022	Level B
Radiated emissions	EN550224	Level A
ESD	EN61000-4-2	Perf. Criteria2
Radiated immunity	EN61000-4-3	Perf. Criteria2
Fast transient	EN61000-4-4	Perf. Criteria2
Surge	EN61000-4-5	Perf. Criteria2
Conducted immunity	EN61000-4-6	Perf. Criteria2

### NOTE:

- Maximum output deviation is 10% inclusive of trim. If remote sense is not being used, the +Vsense should be connected to its corresponding +OUTPUT and likewise the -sense should be connected to its corresponding -OUTPUT.
- An external filter capacitor is required for normal operation. The capacitor should be capable of handling 1A ripple current for 48V models. Suggest: Nippon chemi-con KMF series, 220u F/100V, ESR 90mΩ.
- The negative / positive logic and pin length are optional (see table). The pin voltage is referenced to negative input.
- Heat sink is optional.
- The OFQ75 meets level A & level B conducted emissions only with external components connected before the input pin to the converter.
- Typical value at nominal input voltage and full load.
- BASEPLATE GROUNDING: Base-plate should be grounded at one of the four screw bolts prior to operation.
- The converter is provided with basic insulation.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.

Tel: (973)345-5885 Fax: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com

Selection Guide


(Continued)

SINGLE OUTPUT VOLTAGE	Input Voltage Nominal (Range) (Vdc)	Output Voltage (Vdc)	Output Current (mA)	Efficiency %	Model Number	Case
	48 (36-72)	1.8	25A	85	OFQ75-48S1.8	O
	48 (36-72)	2.5	25A	87	OFQ75-48S2.5	O
	48 (36-72)	3.3	20A	90	OFQ75-48S3.3	O
	48 (36-72)	5	15A	90	OFQ75-48S5	O


Mechanical Specifications

PIN CONNECTIONS	
PIN NO.	Define
1	-INPUT
2	ON/OFF
3	+INPUT
4	-OUTPUT
5	-SENSE
6	TRIM
7	+SENSE
8	+OUTPUT

PIN 1, 2, 3, 5, 6, 7, DIM. 0.040 (1.016mm)  
 PIN 4, 8, DIM. 0.060 (1.57mm)  
 Tolerance: x.xx±0.02(x.x±0.5)  
 x.xxx±0.01(x.xx±0.25)

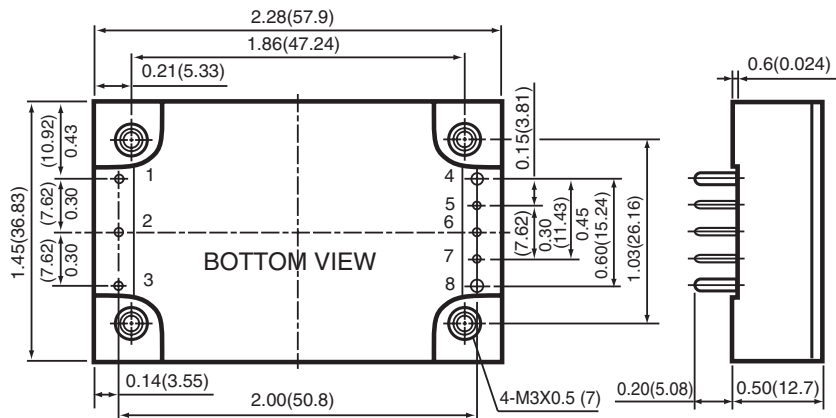

All Dimensions in inches (mm)  
 Pin Pitch tolerance ±0.014 (0.35)

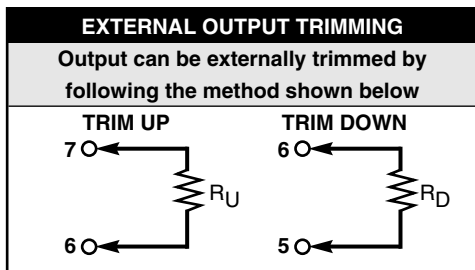

PRODUCT OPTIONS TABLE	
OPTION	SUFFIX
Negative remote ON/OFF logic, 0.20" pin length (standard)	-
Negative remote ON/OFF logic, 0.145" pin length	-L
Negative remote ON/OFF logic, 0.11" pin length	-K
Positive remote ON/OFF logic, 0.20" pin length	-P
Positive remote ON/OFF logic, 0.145" pin length	-S
Positive remote ON/OFF logic, 0.11" pin length	-M



POLYTRON DEVICES, Inc.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.  
 Tel: (973)345-5885 Fax: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com